

For: ☐ File ☐ Resubmit ☐ Approval ☐ Other _____

M2430B**-EC*

2.5-ton SDHV Modular Variable Speed Air Handler (Blower)

Green Series

Job Name:

Location:

Date:

Tag #:

Architect:

Engineer:

Mechanical:

Distributor:

Rep:

(Company)

(Project Manager)



M2430BL*-EC*



Control Box

Features

- Modular construction
- Multiple configurations
- Right-Handed and Painted options available
- EC Motor (variable speed)
- High system efficiency
- Easy service motor/blower
- Constant airflow
- Smart device connectivity (WiFi)
- Includes S.M.A.R.T. control board

Matching Modules

M2430C**-B
M2430C**-E
M2430C**-C
M2430C**-H
M2430V*
M2430R1

Indoor Unit Size

2430

Operating Range:

Nominal Airflow	625 CFM (1080 m³/h)
Static pressure at nominal airflow	1.5 in. w.c. (373 Pa)
Airflow Range	200 to 700 CFM (350 to-1200 m³/h)

General Data:

Blower wheel diameter	9.5 in. (241 mm)
Blower wheel width	3.75 in. (95 mm)
Fan motor type	ECM
Fan motor size	1/2 hp (373 W)
Fan Speeds	Variable
Maximum motor speed	1800 RPM
Maximum air temperature over moto	150 °F (65 °C)
Supply duct size, minimum	7 in. (178 mm)
Sound Pressure Level*	56 dB(A) NC-50
Net unit weight	52 lbs. (24 kg)
Shipping Weight	57 lbs. (26 kg)
Dimensions (H x W x D)	17.5 x 25 x 14 in. (445 x 635 x 349 mm)

* Measured 3 ft (1 m) from unit

Electrical:

Control Box Style	EC2	EC3
Power Supply (Hz, Ph)	50/60, 1	
Voltage	120V/208V/230V	
Full Load Current	5.6 A/3.2 A	
Min. Circuit Ampacity	7.0 A/4.0 A	
Max. Overcurrent Protection	15 A	
Allowable Breaker Sizes	15 A	

Optional Accessories:

- ☐ Control box extension cable, 98" (2.5 m) (A01525-G02)
- ☐ Hot water coil heating module (M2430CL1-H)
- ☐ Return air module with filter (M2430R1)
- ☐ Vertical base module with filter (M2430V*)
- ☐ Secondary drain pan, 2 module (UPC-20B)
- ☐ Secondary drain pan, 3 module (UPC-20C)
- ☐ Supply duct adapter, round (UPC-61-2430)
- ☐ Supply duct adapter, square (UPC-62-2430)
- ☐ Return adapter (UPC-104-2430)

Notes:

1. Absolute operating voltage range: 104V – 127V, 188V – 254V
2. All wiring and piping must comply with applicable local and national code.
3. Refer to installation manual for more information.
4. Revision 1 connects to PC-only via USB.

Model Number Key:

M	2430	B	L	1	-	EC*	1
Model Series	Matching ODU Nominal Capacity	Module Type	Configuration	Revision		Motor Style	Options
M = Modular	2430 = 24000 to 30000 Btu/hr	B = Blower	L = Left R = Right	1 = USB 2 = WiFi		EC2 = 120V – 208/230V EC3 = 120V – 208/230V, CE/UKCA marked	1 = Paint White

ODU = Outdoor Unit

Note – for continuous product improvement, Unico reserves the right to change specifications without notice.

© 2025 Unico, Inc., Arnold, MO. "Unico System" is a registered trademark of Unico, Inc. (www.unicosystem.com)

SB-M2430B**-EC.005 (20250423)

Page 1 of 2

M2430B**-EC*


Job Name:

Location:


Date:

Tag #:

BLOWER MODULE DIMENSIONS

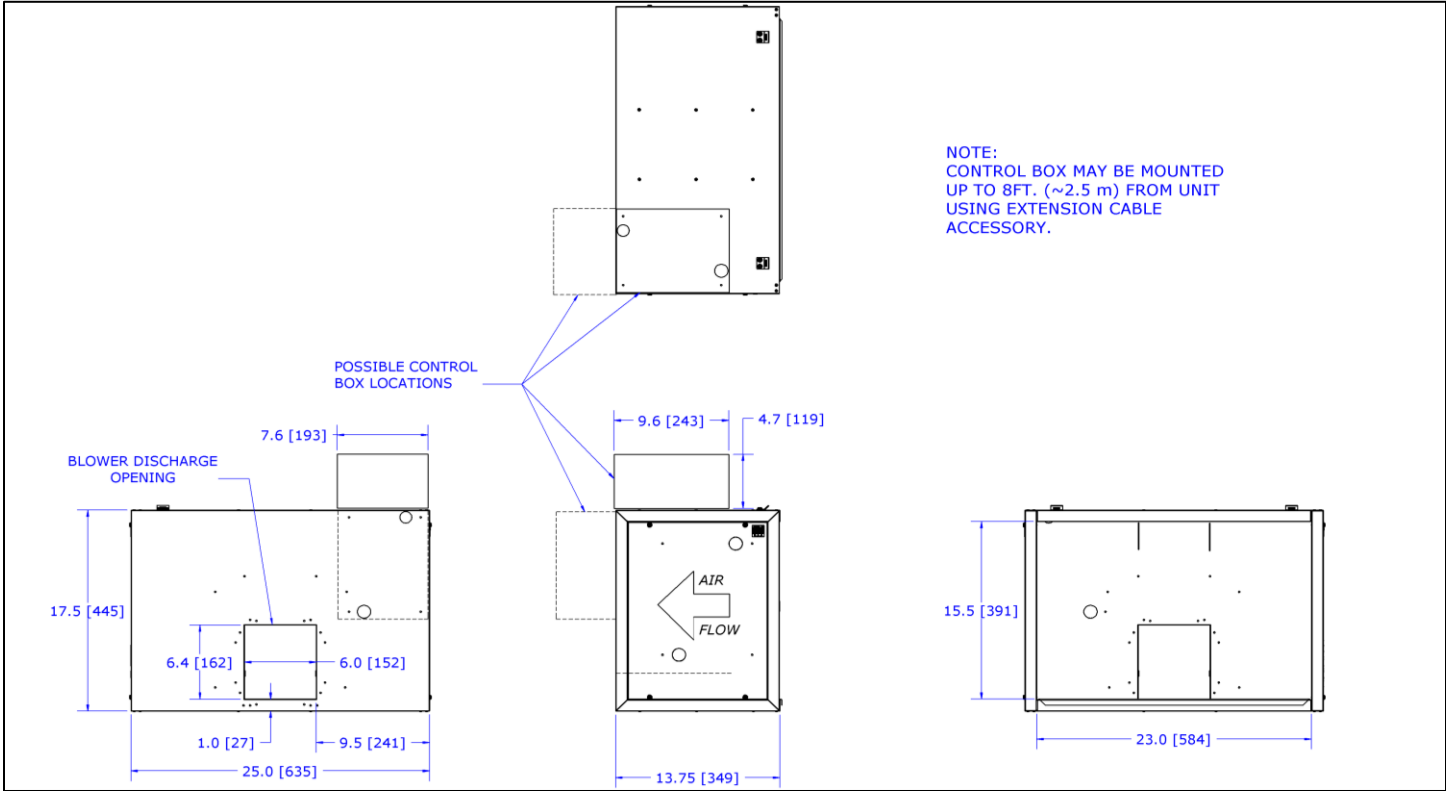

* Contact Unico for dimensions of assembled modules.

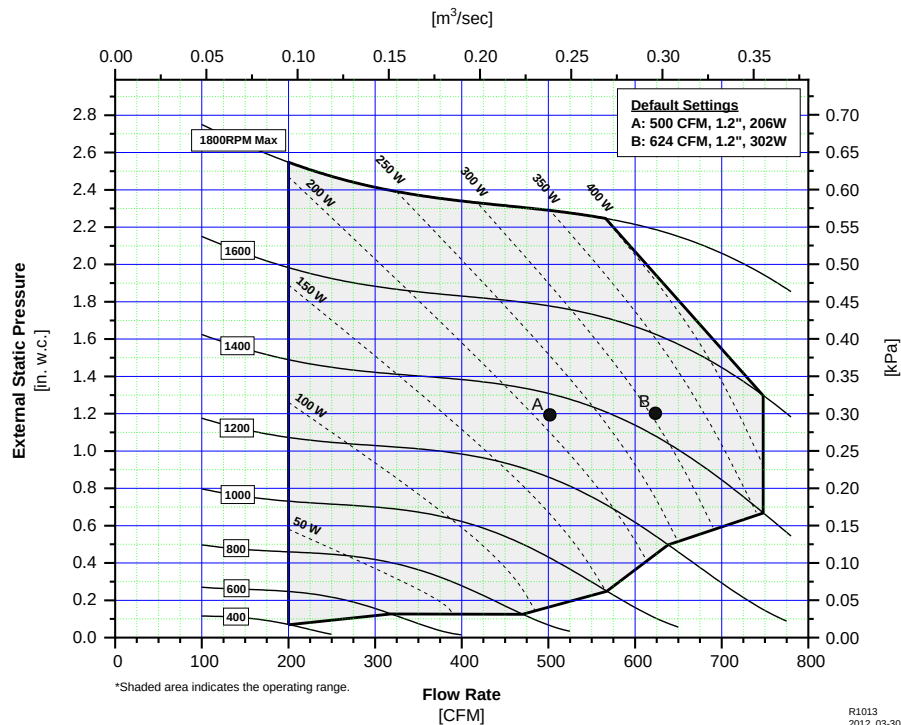

R1013
2012 03-30

Unico, Inc.
<http://unicosystem.com>
314-481-9000
800-527-0896
sales@unicosystem.com

CE

UK
CA

Intertek

AHRI CERTIFIED

Variable Refrigerant Flow (VRF) Multi-Split AC and HP
AHRI Standard 132A

AHRI CERTIFIED

Unitary Small HP
AHRI Standard 210/240
Certification applies only when the complete system
is tested with AHRI